



DIP-KHZ系列

DIP 3X8 2X6

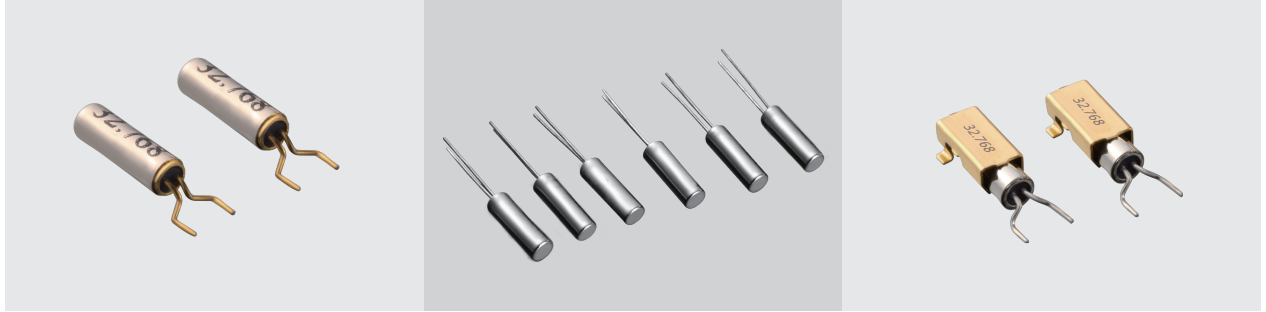

◎ 产品尺寸图 /Product dimension drawing <unit:mm>

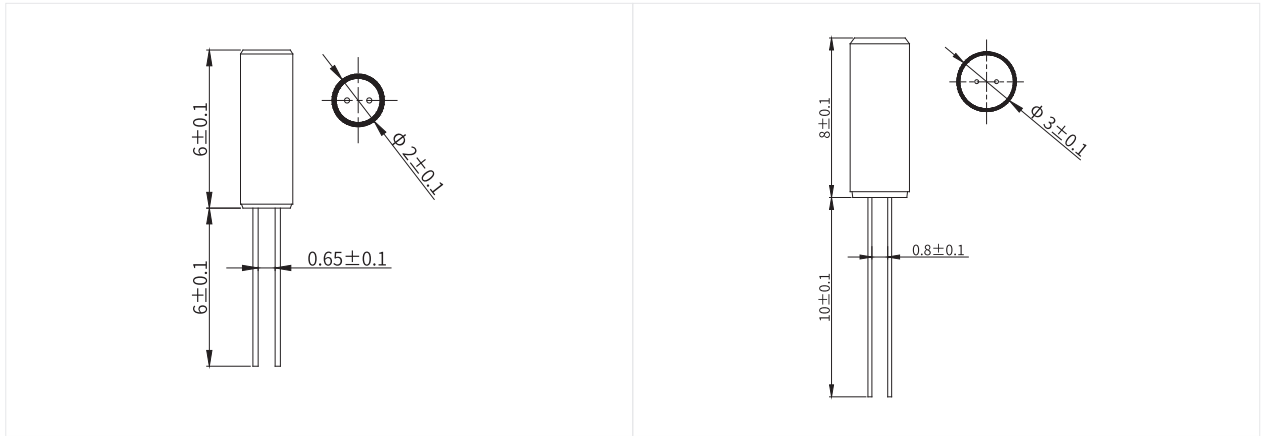

◎ 产品参数 /Product parameter

项目 Item \ 类型 Type	DIP2X6	DIP3x8
频率范围Frequency Range		32.768k
调整频差Frequency Tolerance(at 25°C)		±20ppm or specify
工作温度Operating Temperature Range		-20~+70°C
静态电容Shunt Capacitance(C0)		2.0pF typical
绝缘电阻Insulation Resistance(IR)		500MΩ Min 100VDC/+15VDC
激励功率Drive Level		1.0μW Max
负载电容Load Capacitance		12.5pF or other spec
点温度Turnover Temperature(Ti)		25°C±5°C
温度系数Parabolic Coefficient(B)		$(-0.04±0.01) \times 10^{-6}/^{\circ}\text{C}^2$
老化率Aging(at 25°C)		±5ppm at first year
储存温度Storage Temperature Range		-40~+85°C
等效串联电阻 Equivalent Series Resistance(ESR)		30kΩ Max

◎ 应用范围 /applied range

